

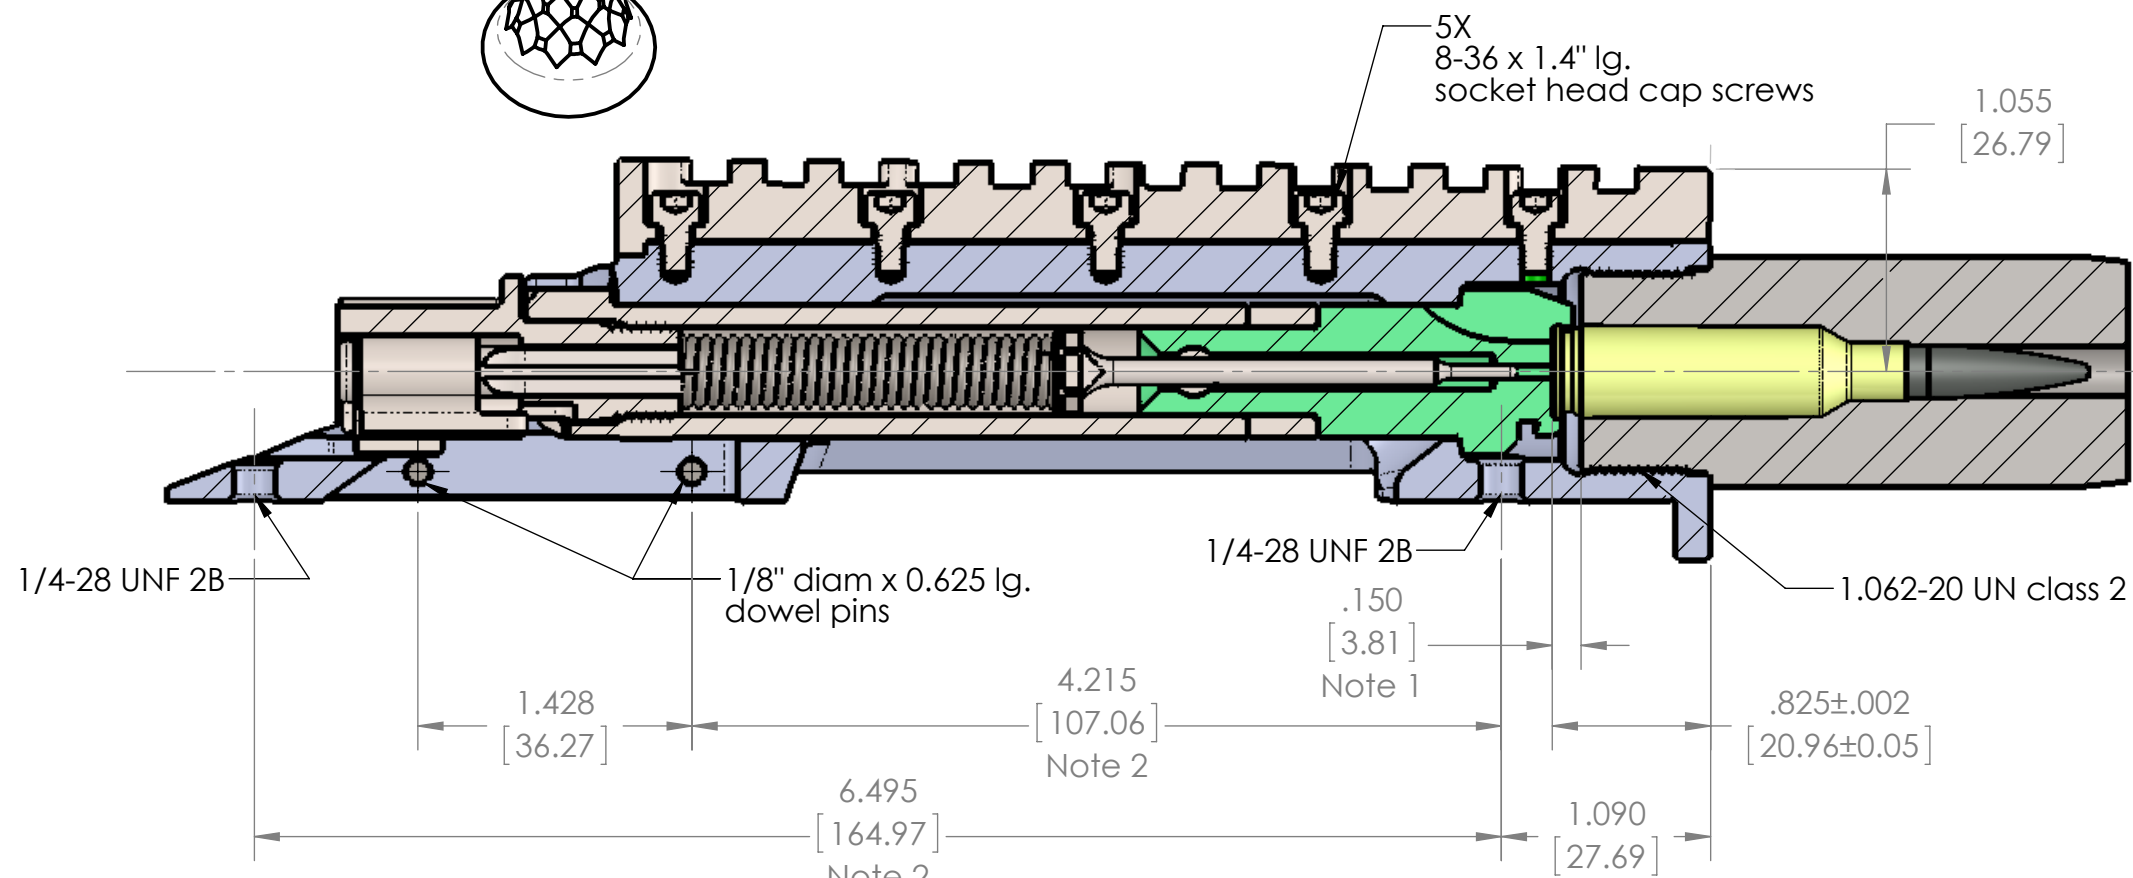


REVISIONS			
REV	DESCRIPTION	DATE	ENGINEER

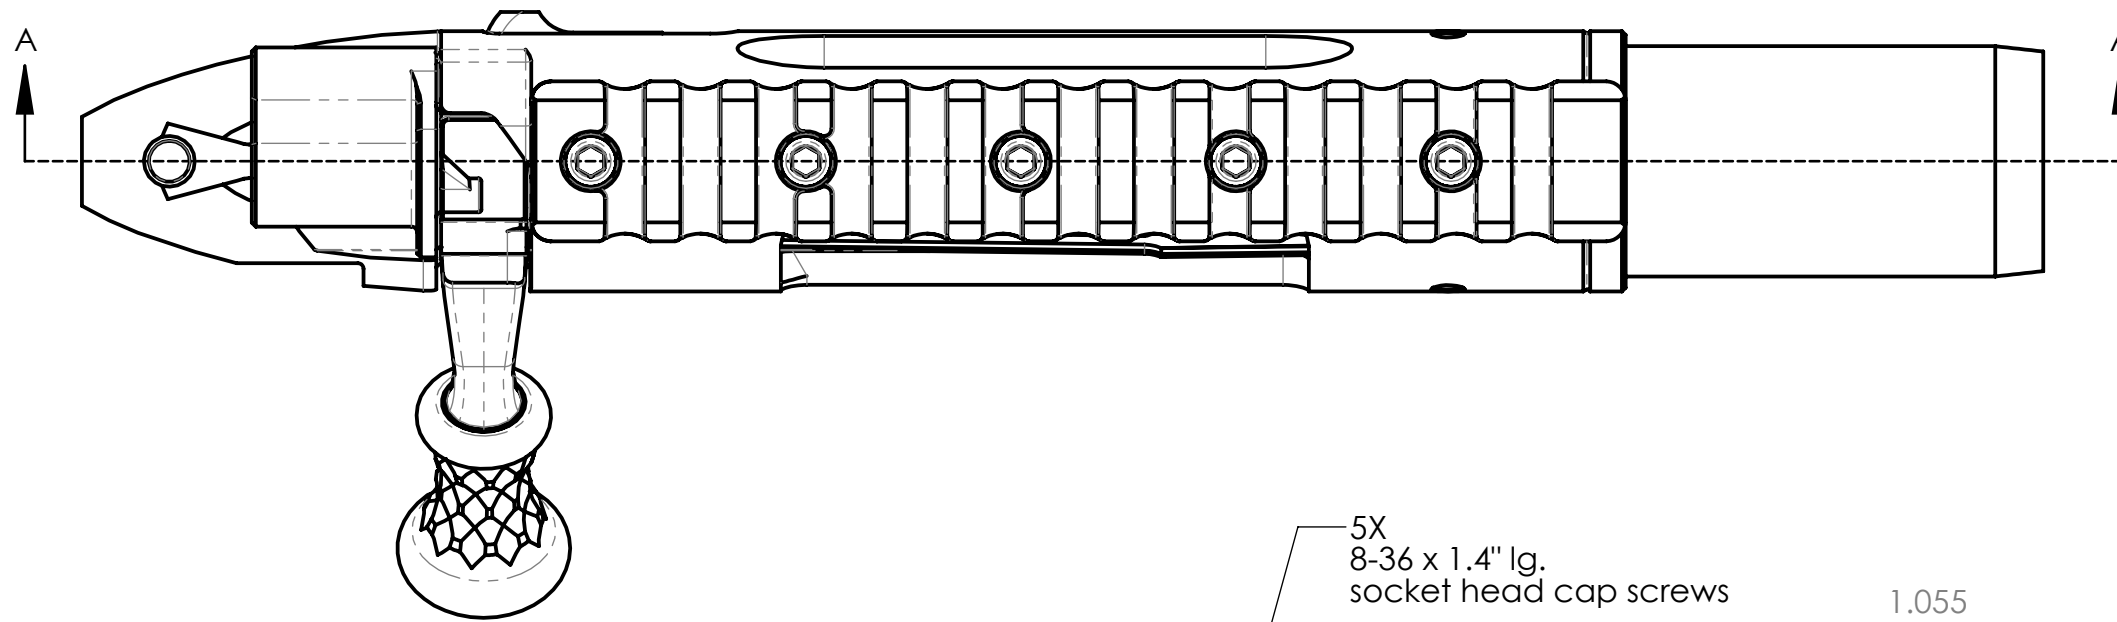

SECTION A-A

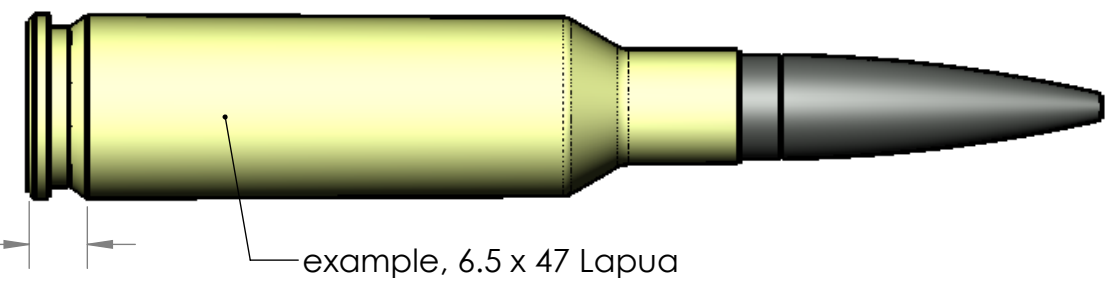

Note 1: This dimension should be at least 0.130". It can be larger depending on the cartridge that will be used. For best results, the entire case head should be exposed. For example, the distance between the bolt face and the breech face of the barrel can be 0.152 inches for the 6.5 x 47 Lapua, shown right.

Note 2: Add 0.850 inches (21.59mm) for long action.

American Rifle Company, Inc.
All information contained herein is proprietary to American Rifle Co. and shall not be reproduced or disclosed in whole or in part or used for any purpose except when such user possesses direct written authorization from American Rifle Co. Paper copies of this document are not revision controlled and are for reference only.

Created: Thursday, December 8, 2016 11:10:21 AM

Unless otherwise specified:
 Deburr part completely,
 0.020" (0.5mm) max edge break
 ASME Y14.5-2009, ANSI/ASME
 B46.1-1985, AWS D1.1 shall apply.

3rd Ang Proj Units of Measure: inches

Global Bilat Tol:
 All part surfaces shall lie within the global bilateral profile of surface tolerance zone for which the respective basic surface is established by the corresponding surface of the CAD model.

Max Surf Rough (Ra): μ -in

Sheet 1 of 1 Engineer: T. Karagias

Material: XXX
 Heat Treatment: N/A
 Surface Treatment:

Drawing Rev: - Drawing File Name: Mausingfield barrel interface
 Part Rev: B-01 Part File Name: M5 action assy
 Description: XXX